


FPF SERIES

Non-Metallic Fixture for Food Processing


- NSF Certified Food Equipment
- High Pressure Hose Down
- UL 924 Emergency Lighting
- UL 1598 Wet Locations
- CUL

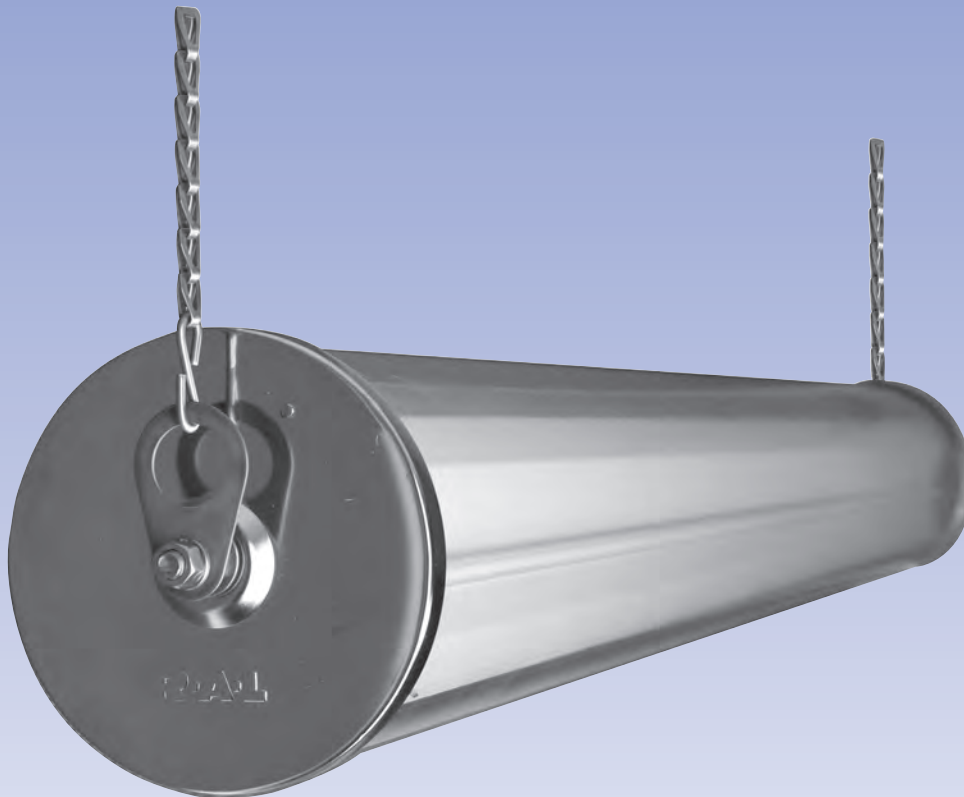

AZZ | R-A-L™
RIG-A-LITE

FPF SERIES

Non-Metallic Fixture for Food Processing

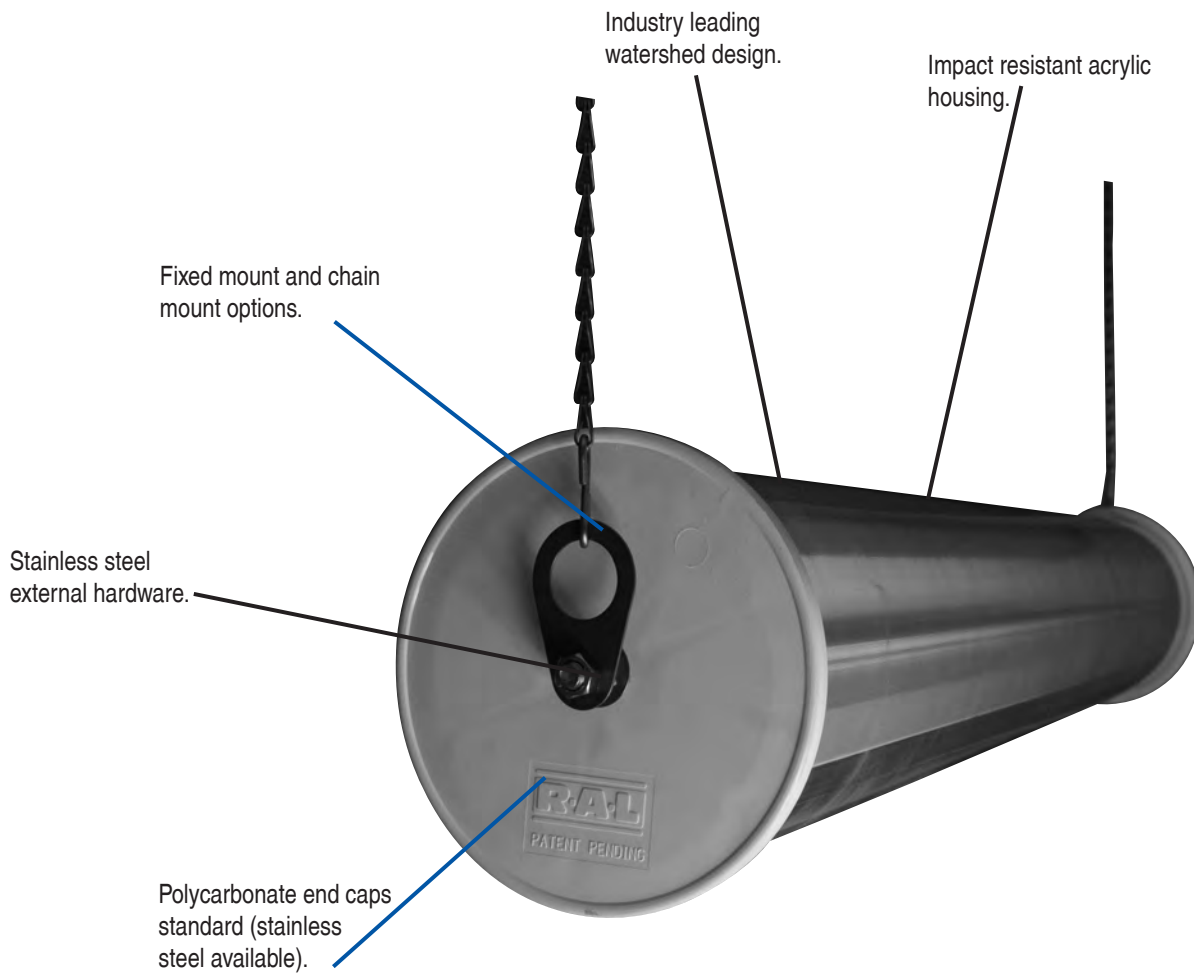

- Indoor or outdoor use
- High pressure hose down
- Emergency option available

FLUORESCENT FPF Series

Non-Metallic Housing • UL 1598 • CUL • Wet Locations • High Pressure Hose Down • Indoor or Outdoor • NSF Certified

Catalog Number Logic

FPF 800-8-4L-U-XX

1

2

3

4

5

6

1

BASIC SERIES¹

FPF Non-Metallic Fluorescent Fixture
UL 1598 Wet Locations
NSF Certified Food Equipment
CUL

2

LAMP CURRENT/LAMP WATTAGE

800 = 800mA, 110, 60 or 35 Watt
430 = 430mA, 34 or 20 Watt (export only)
425 = 425mA, 75, 40 or 20 Watt (Slimline)
265 = 265mA, 59, 32 or 17 Watt (T8 Lamps)
T5HO = T5HO, 54 Watt

3

NOMINAL FIXTURE LENGTH

2 = 2 Foot (T5HO Consult Factory)
4 = 4 Foot
8 = 8 Foot

4

NUMBER OF LAMPS

2L = 2 Lamp
3L = 3 Lamp (4 ft. T5HO Only)
4L = 4 Lamp (8 ft. Only)
6L = 6 Lamp (8 ft. T5HO Only)
Not Available as Emergency

Uplight Options Available Consult Factory

5

VOLTAGE/FREQUENCY

A = 120V 60HZ (430 mA Emergency Only)
B = 236V 60HZ (430 mA Emergency Only)
C = 277V 60HZ (430 mA Emergency Only)
D = 220V 50HZ
E = 12V DC
F = 24V DC
G = 32V DC
H = 347V 60HZ
U = 120 thru 277V 50/60HZ

6

OPTIONS²

WO = White Optic Reflector
F = Single Fuse
FM = Stainless Steel Fixed Mount
HL = Hi-Lumen Ballast (T8 Only)
L = Lamps
LC = Coated Lamps
R = Radio Interference Filter
SS = Stainless Steel End Caps
EON = Emergency Only
ENN = Emergency & Normal Operation
ENS = Emergency & Normal Switched
1UP = 2 lamps down and 1 lamp up

¹ Fixtures are furnished with FPFCKMT1 standard, non-metallic cord grip and 3 ft. long #16, AWG 3 conductor type SOA cable.

² Consult factory for pricing.

Catalog logic is for explaining catalog number structure only. Not all combinations are possible; consult factory for catalog numbers not listed in charts.

FLUORESCENT FPF Series

Non-Metallic Housing • UL 1598 • CUL • Wet Locations • High Pressure Hose Down • Indoor or Outdoor • NSF Certified

Fluorescent Series



- UL 1598 Wet Locations
- CUL
- NSF Certified Food Equipment
- Non-metallic housing
- Aluminum reflector and ballast cover
- External stainless steel hardware
- Suitable for high pressure hose down
- Suitable for indoor or outdoor
- Optional stainless steel end caps available

Fluorescent Emergency Series



- Emergency illumination meets OSHA, Life Safety Code (NFPA 101), and National Electric Code (NFPA 70) requirements
- Switched or non-switched applications
- Provides 1100-1200 lumens of initial light output in emergency mode
- Provides at least 90 minutes of illumination in emergency mode
- Sealed, maintenance-free nickel cadmium batteries with a life expectancy of 7-10 years
- Self Contained unitized construction
- Easily identified as an emergency lighting fixture
- Charging indicator LED pilot light
- Battery cut-off switch is standard
- NSF Certified Food Equipment

Fixture Dimensions (inches)

FPF SERIES	Dimensions (Inches)		Boxed Weight	Shipping Volume (Boxed Fixtures)
	A	B		
2 Foot Models	28.00	6.75	10 lbs.	1.21 cu. ft.
4 Foot Models	52.00	6.75	20 lbs.	2.1 cu. ft.
8 Foot Models	100.00	6.75	30 lbs.	4.0 cu. ft.

FLUORESCENT FPF Series

Non-Metallic Housing • UL 1598 • CUL • Wet Locations • High Pressure Hose Down • Indoor or Outdoor • NSF Certified

Fluorescent Series

(Lamps not included)

	Description	Voltage	Catalog Number
Two Foot Fixture	20 Watt, Preheat, Trigger Start Medium Bi-Pin, T12 430mA Lamps, 24" (export only)	120-277V 50/60HZ	FPF430-2-2L-U
	17 Watt, Rapid Start Medium Bi-Pin, T8 265mA Lamps, 24"	120-277V 50/60HZ	FPF265-4-2L-U
Four Foot Fixture	34 Watt, Rapid Start Medium Bi-Pin, T12 430mA Lamps, 48" (export only)	277V/60HZ	FPF430-4-2L-U
	40 Watt, Instant Start, Slimline T12, Single Pin, 425mA Lamps, 48"	12V DC	FPF425-4-2L-E
		24V DC	FPF425-4-2L-F
		32V DC	FPF425-4-2L-G
	54 Watt, T5HO Miniature Bi-Pin, 48"	120-277V 50/60HZ	FPFT5HO-4-2L-U
			FPFT5HO-4-3L-U
	60 Watt, Rapid Start, High Output T12, Recessed Double Contact 800mA Lamps, 48"	120-277V 50/60HZ	FPF800-4-2L-U
Eight Foot Fixture	32 Watt, Rapid Start Medium Bi-Pin, T8 265mA Lamps, 48"	120-277V 50/60HZ	FPF265-8-4L-U
	54 Watt, T5HO Miniature Bi-Pin 96"	120-277V 50/60HZ	FPFT5HO-8-4L-U
			FPFT5HO-8-6L-U
	59 Watt, Rapid Start Slimline, T8 Single Pin 265mA Lamps, 96"	120-277V 50/60HZ	FPF265-8-2L-U
	75 Watt, Instant Start Slimline, T12, Single Pin 425mA Lamps, 96"	12V DC	FPF425-8-2L-E
		24V DC	FPF425-8-2L-F
		32V DC	FPF425-8-2L-G
	110 Watt, Rapid Start, High Output T12, Recessed Double Contact 800mA Lamps, 96"	120-277V 50/60HZ	FPF800-8-2L-U

Fixtures are furnished with stainless steel chain mount kit, non-metallic cord grip and 3 ft. long #16 AWG 3 conductor type SOA cable.

FLUORESCENT FPF Series

Non-Metallic Housing • UL 1598 • CUL • Wet Locations • High Pressure Hose Down • Indoor or Outdoor • NSF Certified

Fluorescent Emergency Series

(Lamps not included)

Fixture Type	Circuit Type	Nominal Fixture Length	Description	Voltage	Catalog Number
Emergency Only Operation	Non-Switched ^①	Two Foot 2 Lamp Fixture	20 Watt, Preheat, Trigger Start Medium B-Pin, T12 430mA Lamps, 24" (export only)	120-277V 50/60HZ	FPF430-2-2L-U-EON
			17 Watt, Instant Start, Medium Bi-Pin, T8 265mA Lamps, 24"	120-277V 50/60HZ	FPF265-2-2L-U-EON
		Four Foot 2 Lamp Fixture	34 Watt, Rapid Start Medium Bi-Pin, T12 430mA Lamps, 48" (export only)	120--277V 50/60HZ	FPF430-4-2L-U-EON
			32 Watt, Instant Start, Medium Bi-Pin, T8 265mA Lamps, 48"	120-277V 50/60HZ	FPF265-4-2L-U-EON
			60 Watt, Rapid Start, High Output T12, Recessed Double Contact 800mA Lamps, 48"	120-277V 50/60HZ	FPF800-4-2L-U-EON
Emergency and Normal Operation	Non-Switched ^①	Four Foot 2 Lamp Fixture	34 Watt, Rapid Start Medium Bi-Pin, T12 430mA Lamps, 48" (export only)	120-277V/ 5060HZ	FPF430-4-2L-U-ENN
			32 Watt, Instant Start, Medium Bi-Pin, T8 265mA Lamps, 48"	120-277V 50/60HZ	FPF265-4-2L-U-ENN
			60 Watt, Rapid Start, High Output T12 Recessed Double Contact 800mA Lamps, 48"	120-277V 50/60HZ	FPF800-4-2L-U-ENN
			54 Watt, T5HO Miniature Bi-Pin Lamps, 48"	120-277V 50/60HZ	FPFT5HO-4-2L-A-ENN FPFT5HO-4-2L-C-ENN
		Four Foot 3 Lamp Fixture	54 Watt, T5HO Miniature Bi-Pin Lamps, 48"	120-277V 50/60HZ	FPFT5HO-4-3L-A-ENN FPFT5HO-4-3L-C-ENN
		Eight Foot 2 Lamp Fixture	59 Watt, Rapid Start, Slimline Single Pin, T8, 265mA Lamps, 96"	120-277V 50/60HZ	FPF265-8-2L-U-ENN
		Eight Foot 4 Lamp Fixture	32 Watt, Instant Start, Medium Bi-Pin, T8 265mA Lamps, 96"	120-277V 50/60HZ	FPF265-8-4L-U-ENN
			54 Watt, T5HO Miniature Bi-Pin Lamps, 96"	120-277v 50/6HZ	FPFT5HO-8-4L-A-ENN FPFT5HO-4-3L-C-ENN
	Switched ^②	Four Foot 2 Lamp Fixture	34 Watt, Rapid Start Medium Bi-Pin, T12 430mA Lamps, 48" (export only)	120-277V 50/60HZ	FPF430-4-2L-U-ENS
			32 Watt, Instant Start, Medium Bi-Pin, T8 265mA Lamps, 48"	120-277V 50/60HZ	FPF265-4-2L-U-ENS
			60 Watt, Rapid Start, High Output T12, Recessed Double Contact 800mA Lamps, 48"	120-277V 50/60HZ	FPF800-4-2L-U-ENS
		Eight Foot 2 Lamp Fixture	59 Watt, Rapid Start, Slimline Single Pin, T8, 265mA Lamps, 96"	120-277V 50/60HZ	FPF265-8-2L-U-ENS
		Eight Foot 4 Lamp Fixture	32 Watt, Instant Start, Medium Bi-Pin, T8 265mA Lamps, 96"	120-277V 50/60HZ	FPF265-8-4L-U-ENS

① Non-Switched fixtures are furnished with stainless steel chain mount kit, non-metallic cord grip and 3 ft. long #16 AWG 3 conductor type SOA cable.

② Switched fixtures are furnished with stainless steel chain mount kit, non-metallic cord grip and 3 ft. long #16 AWG 4 conductor type SOA cable.

FLUORESCENT
FPF Series

Non-Metallic Housing • UL 1598 • CUL • Wet Locations • High Pressure Hose Down • Indoor or Outdoor • NSF Certified

Fluorescent Photometrics

FPF26584L


Fluorescent Photometrics

FPFT5H043

FLUORESCENT FPF Series

Non-Metallic Housing • UL 1598 • CUL • Wet Locations • High Pressure Hose Down • Indoor or Outdoor • NSF Certified

Accessories

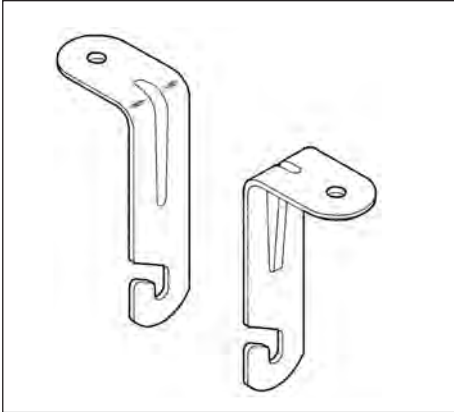

Fixed Mounting Bracket Kit

Stainless Steel - For 3/8 in. Bolts (not provided)
Catalog Number: FPFDMKT
Shipping Weight: 0.4 lbs.




Chain Mounting Kit

Stainless Steel
Catalog Number: FPFCMKT1
Shipping Weight: 0.2 lbs.




Stainless Steel Band Clamp

Catalog Number: FPFBNDMKT
Shipping Weight: 1.0 lbs.

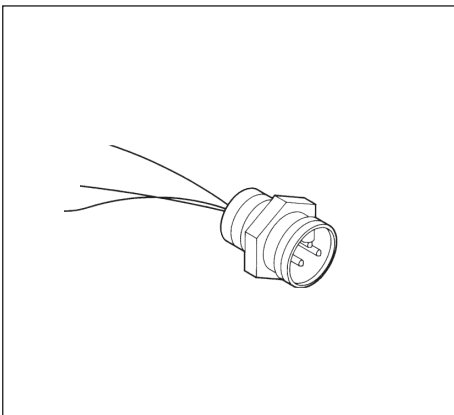


Mini Receptacle 3P Male

Catalog Number: 64005
Shipping Weight: 0.1 lbs.

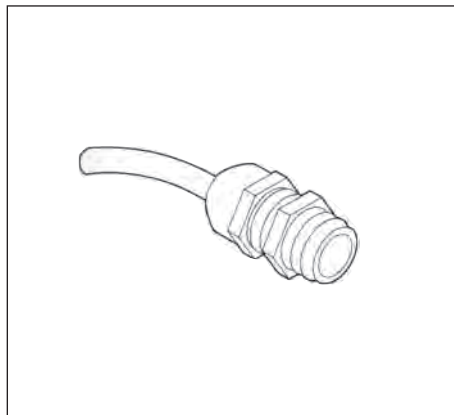


Pigtail Assembly- 3 ft. Cable

Other Lengths Available - Consult Factory
Catalog Number: 53108
Shipping Weight: 0.4 lbs.

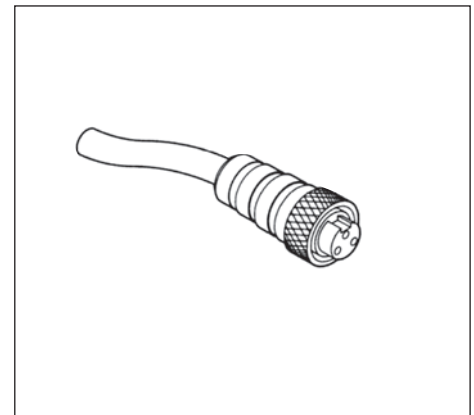


Mini Plug 3P- 6 ft. Mini Cable

Other Lengths Available - Consult Factory
Catalog Number: 60006
Shipping Weight: 0.6 lbs.



Polycarbonate Endcap Kit

Includes All Gaskets Glued in Place
Catalog Number: 53101
Shipping Weight: 3 lbs.



Stainless Endcap Kit

Includes All Gaskets Glued in Place
Catalog Number: 53101SS
Shipping Weight: 2.5 lbs.