


OB INCANDESCENT SERIES

Helideck Lighting

- UL 844 Hazardous Locations
- UL 1598A Marine Outside Type
- Class I, Division 2, Groups A, B, C & D
- CAP 437 Compliant

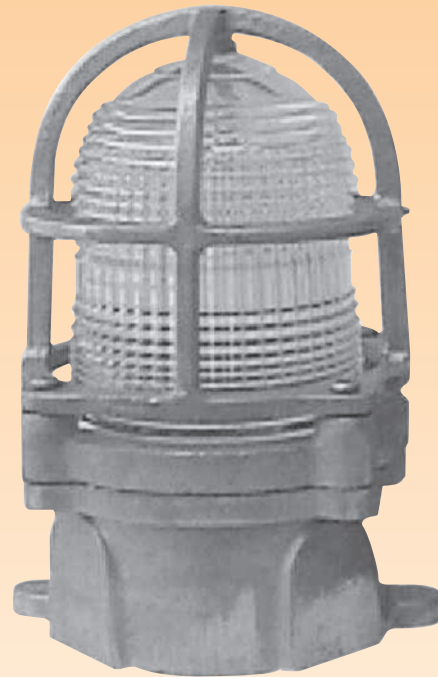

AZZ | R-A-L™
RIG-A-LITE


OB INCANDESCENT SERIES

Helideck Lighting

Clear globe standard— red, green, blue and amber are available.

Surface or pendant 1/2 in. and 3/4 in. hubs available.

Cast bronze or copper free aluminum.

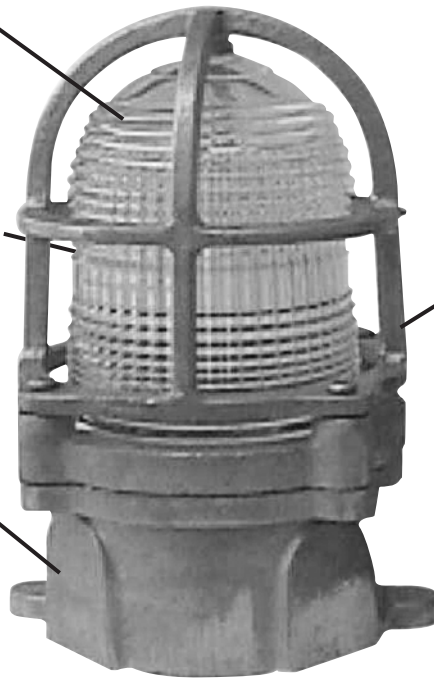

INCANDESCENT

OB Series

Hazardous Locations • Class I, Division 2 • UL 844 • UL 1598A Marine Outside Type • CAP 437 Compliant

Catalog Number Logic

OB-B-I-S-C-G-75-1

1 2 3 4 5 6 7 8

1 BASIC SERIES
OB Incandescent Series
UL 1598A Marine Outside Type
UL 844 Hazardous Locations
Class I, Division 2 Groups A, B, C & D
CAP 437 Compliant

2 HOUSING TYPE
A = Aluminum
B = Bronze

3 LAMP TYPE
I = Incandescent (100 Watt Maximum)

4 MOUNTING
P = Pendant
S = Surface

5 GLOBE COLOR
A = Amber
B = Blue
C = Clear
G = Green
R = Red

6 GUARD
G = Guard

7 HUB SIZE
50 = 1/2" N.P.T.
75 = 3/4" N.P.T.

8 NUMBER OF HUBS¹
1 = 1 Hub
2 = 2 Hubs
3 = 3 Hubs
4 = 4 Hubs

¹ Applies to surface mount only.
Pendant mount has one hub only.


Catalog logic is for explaining catalog number structure only. Not all combinations are possible; consult factory for catalog numbers not listed in charts.

INCANDESCENT

OB Series

Hazardous Locations • Class I, Division 2 • UL 844 • UL 1598A Marine Outside Type • CAP 437 Compliant




Helideck Lighting

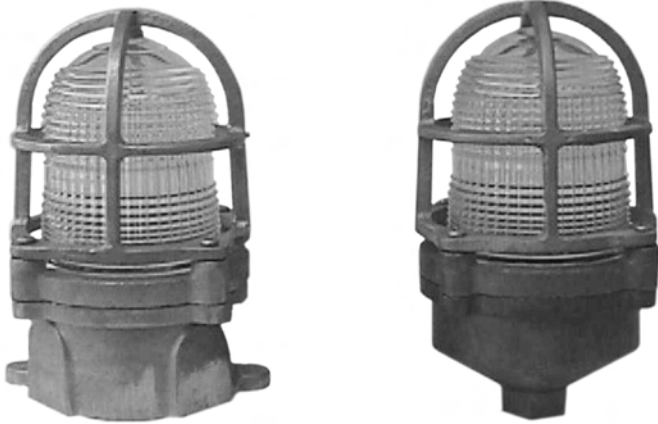

- 1598A Marine Outside Type
- UL 844 Hazardous Locations
- Class I, Division 2 Groups A, B, C and D
- CAP 437 Compliant
- Enclosure and guard are cast bronze or copper free aluminum
- Heat treated clear fresnel globe is standard
Red, green amber and blue heat treated fresnel globes available as an option
- Fixtures available as surface or pendant mount with 1/2 in. or 3/4 in. NPT hubs
- Marine type medium base phenolic lampholder for up to 100 watt A-19, 250V AC max. incandescent lamp

Lamp Type	Mounting	Housing Type	Catalog Number	Shipping Weight (Lbs.)
Incandescent	Pendant Mount with Guard	Aluminum	OB-A-I-P-C-G-50-1	4.38
	Pendant Mount with Guard	Bronze	OB-B-I-P-C-G-50-1	9.36
	Surface Mount with Guard	Aluminum	OB-A-I-S-C-G-50-1	4.74
	Surface Mount with Guard	Bronze	OB-B-I-S-C-G-50-1	10.69


Fixture Dimensions (inches)

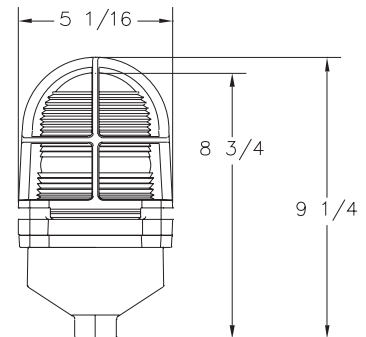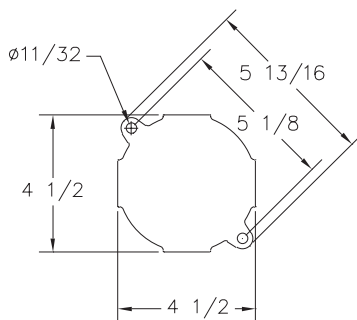

INCANDESCENT

OB Series

Hazardous Locations • Class I, Division 2 • UL 844 • UL 1598A Marine Outside Type • CAP 437 Compliant

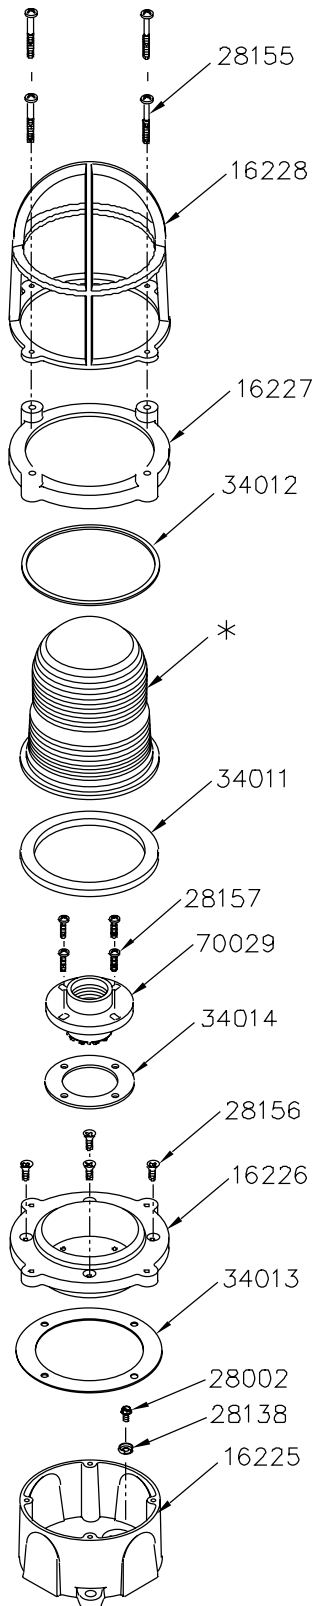

Parts List

CATALOG NUMBER OB-B-I-S-R-G-75-1

Part No.	Description	Weight
16225BM	JUNCTION BOX BRONZE	4.0
16226BM	LPHLDR MT BRONZE	2.0
16227BM	RETAINING RING BRONZE	1.0
16228BM	GUARD BRONZE	1.5
28155	SCREW PAN PHLP	0.1
28156	SCREW FLAT HD	0.1
28157	SCREW RD PHLP HD	0.1
34011	GSKT LENS CLOSE CELL SILICONE	0.1
34012	GSKT LENS TOP	0.1
34013	GSKT J BOX	0.1
34014	GSKT LPHLDR OB SERIES	0.1
36060	LENS FRESNEL RED TEMPERED GLASS	1.0
70029	LPHLDR INCAND	.25

*Part number will vary by globe color. Contact customer service for part number.

Note: 1. Above drawing and part numbers are for fixture catalog no. OB-B-I-S-R-G-75-1

2. Parts may vary for other models. Contact factory if parts for other models are required.

3. Ballasts and lamps are listed on separate pages.

NOTES