


XPEX SERIES

Explosion Proof Edge Lit LED Sign/Exit Light


- Class I, Division 1, Groups C & D
- Class II, Division 1 & 2, Groups E, F & G
- Class III
- Class I, Zone 1, Groups IIA, IIB,
- Zone 2, Groups IIA, IIB + H2 & IIC
- UL 844, 8750 & UL924
- UL1598A Marine Outside Type
- Temperature Class (T-Rating)-T6
- Patent No. 7,287,347
- IP65

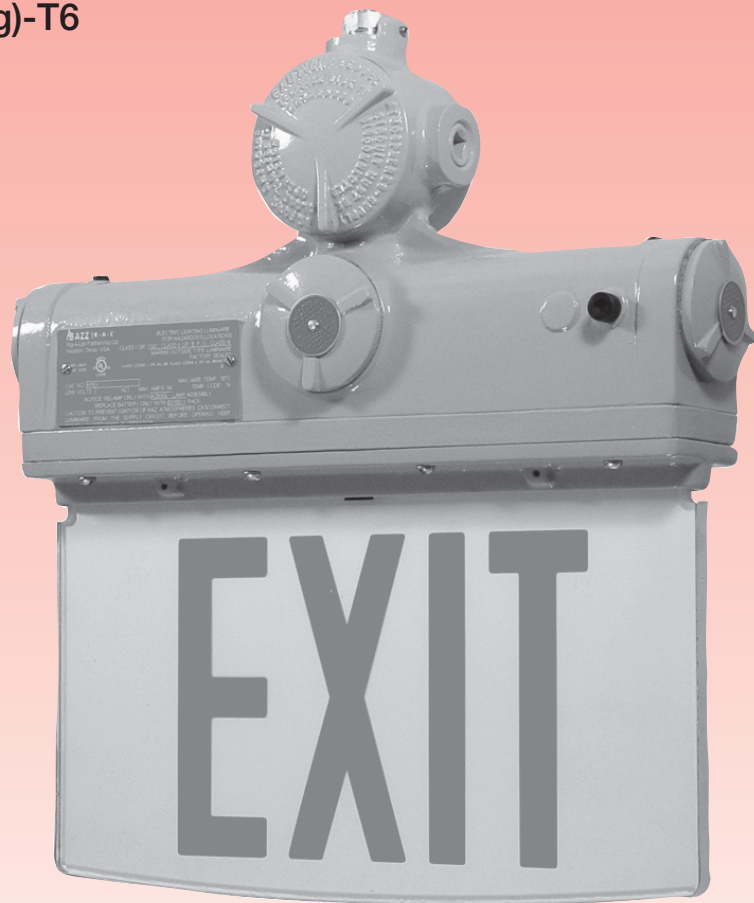

AZZ | R-A-L™
RIG-A-LITE

XPEX SERIES

Explosion Proof LED Edge Lit Sign/Exit Light

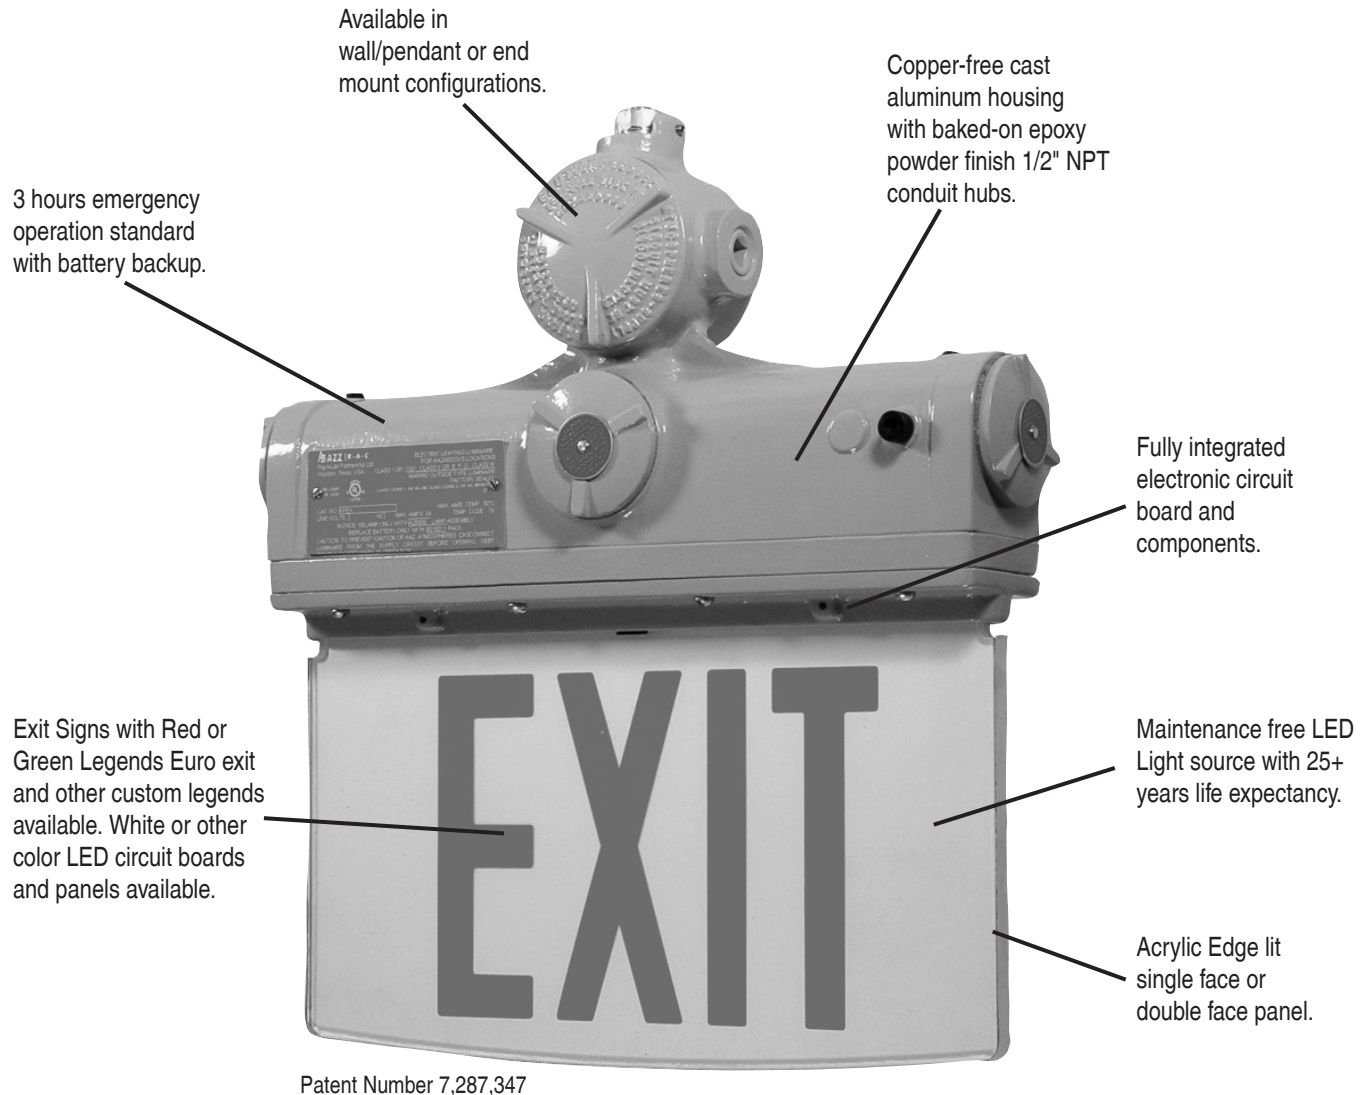

XPEX series fixture uses a maintenance free LED light source with a 25 year life expectancy. Emergency fixtures meet or exceed NFPA70, NFPA101, EPA Energy Star and OSHA requirements. These fixtures are also suitable for installation in wet or damp locations where salt water spray is possible.

XPEX Series

Explosion Proof • UL 844 • UL 924 • UL 1598A Marine Outside Type • Factory Sealed

Catalog Number Logic

XPEX-2-G-DT-WP-XX

1 2 3 4 5 6

1

BASIC SERIES

- (i) XPEX Explosion Proof LED Exit Light
 - (ii) XPS Explosion Proof LED Sign Light*
- *Customer must specify sign color and legend
- Class I, Division 1, Groups C, & D
Class II, Division 1 & 2, Groups E, F & G
Class III
Class I, Zone 1, Groups IIA, IIB,
Zone 2, Groups IIA, IIB + H2 & IIC
Marine Outside Type
UL 1598A, 8750, 844 & 924
IP65
Temperature Class (T-Rating)-T6

2

NUMBER OF FACES

- 1 = Single Face
- 2 = Double Face

3

LEGEND COLOR

- R = Red
- G = Green
- X = Other (Contact Factory)

4

VOLTAGE/FREQUENCY

- DT = 120/277V 60HZ
- 24 = 220-240V 50/60HZ
- Other voltages available- consult factory.

5

MOUNTING

- WP = Wall/Pendant Mounting
- EB = End Bracket

6

OPTIONS¹

- EM = Emergency Battery Backup
- EU = Euro Legends (Consult Factory for Full Range)
- SD = Self Diagnostics
- X = Custom Legend (for XPS only)

¹Consult factory for pricing.

Maximum Input Power

- Red no battery- 1.5 Watts
- Red with battery- 2.5 Watts
- Green no battery- 2.3 Watts
- Green with battery- 3 Watts


Operating Temperature Range

- Temperature Rating- T6
- Red Legend
- +10° C Minimum to +55° C Maximum
- Green Legend
- +10° C Minimum to +40° C Maximum

Catalog logic is for explaining catalog number structure only. Not all combinations are possible; consult factory for catalog numbers not listed in charts.

XPEX Series

Explosion Proof • UL 844 • UL 924 • UL 1598A Marine Outside Type • Factory Sealed

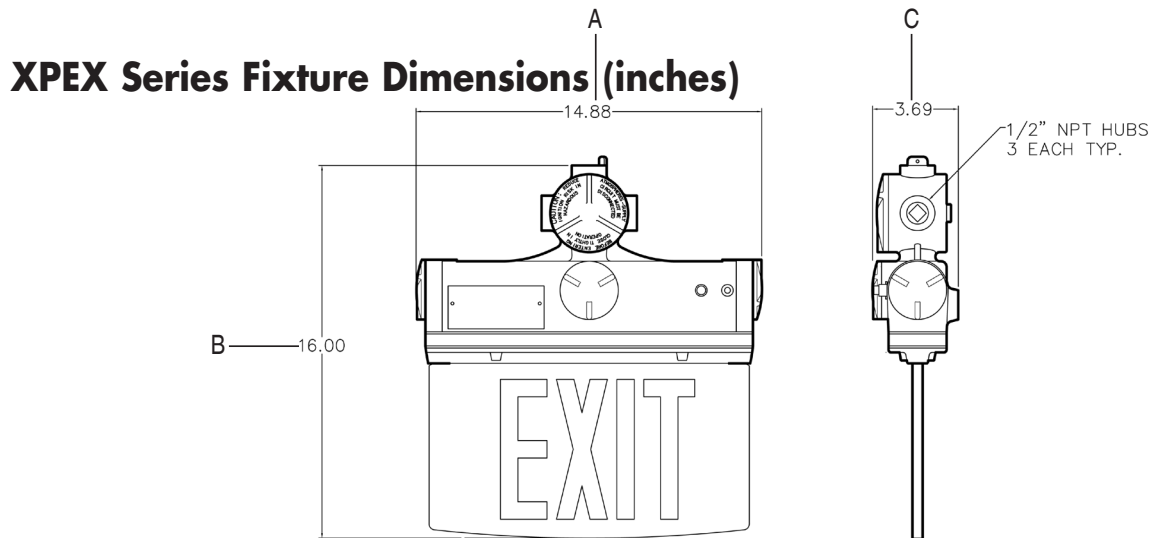

XPEX SERIES	Dimensions (inches)			Boxed Weight	Shipping Volume (Boxed Fixtures)
	A	B	C		
XPEX LED Exit Sign/Light	14.88	3.69	16.00	14 lbs.	1.24 cu. ft.