


XPPL SERIES

Portable Fluorescent Lighting for Hazardous and Hostile Locations

- Class I, Division 1, Groups C & D
- Class I, Division 2, Groups A, B, C & D
- Suitable for Wet Locations
- UL 1598, 844 & 781
- NEMA 3, 4X, 7CD
- Paint Spray Booth
- IP66

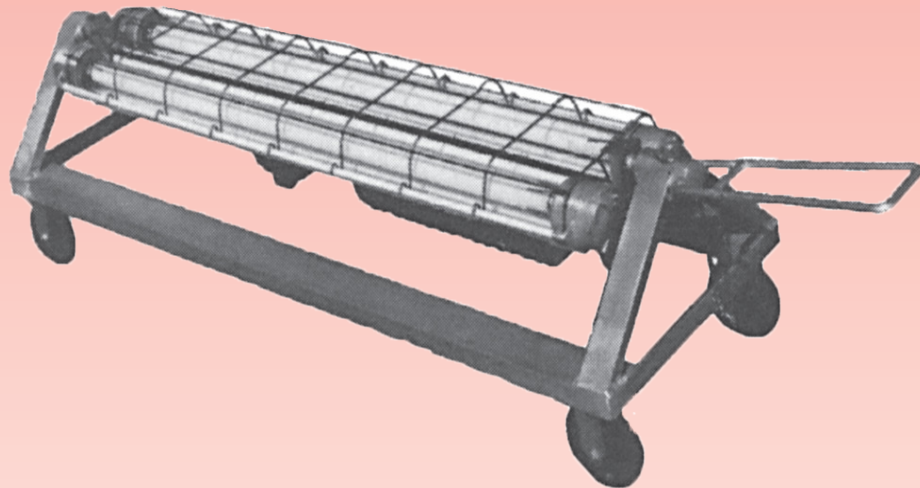


AZZ | R-A-L™
RIG-A-LITE

XPPL SERIES

Portable Fluorescent Lighting for Hazardous and Hostile Locations

Each XPPL Series fixture is individually tested for functional and dielectrical strength at the factory to assure quality and reliability and arrives assembled, reducing installation time and cost.

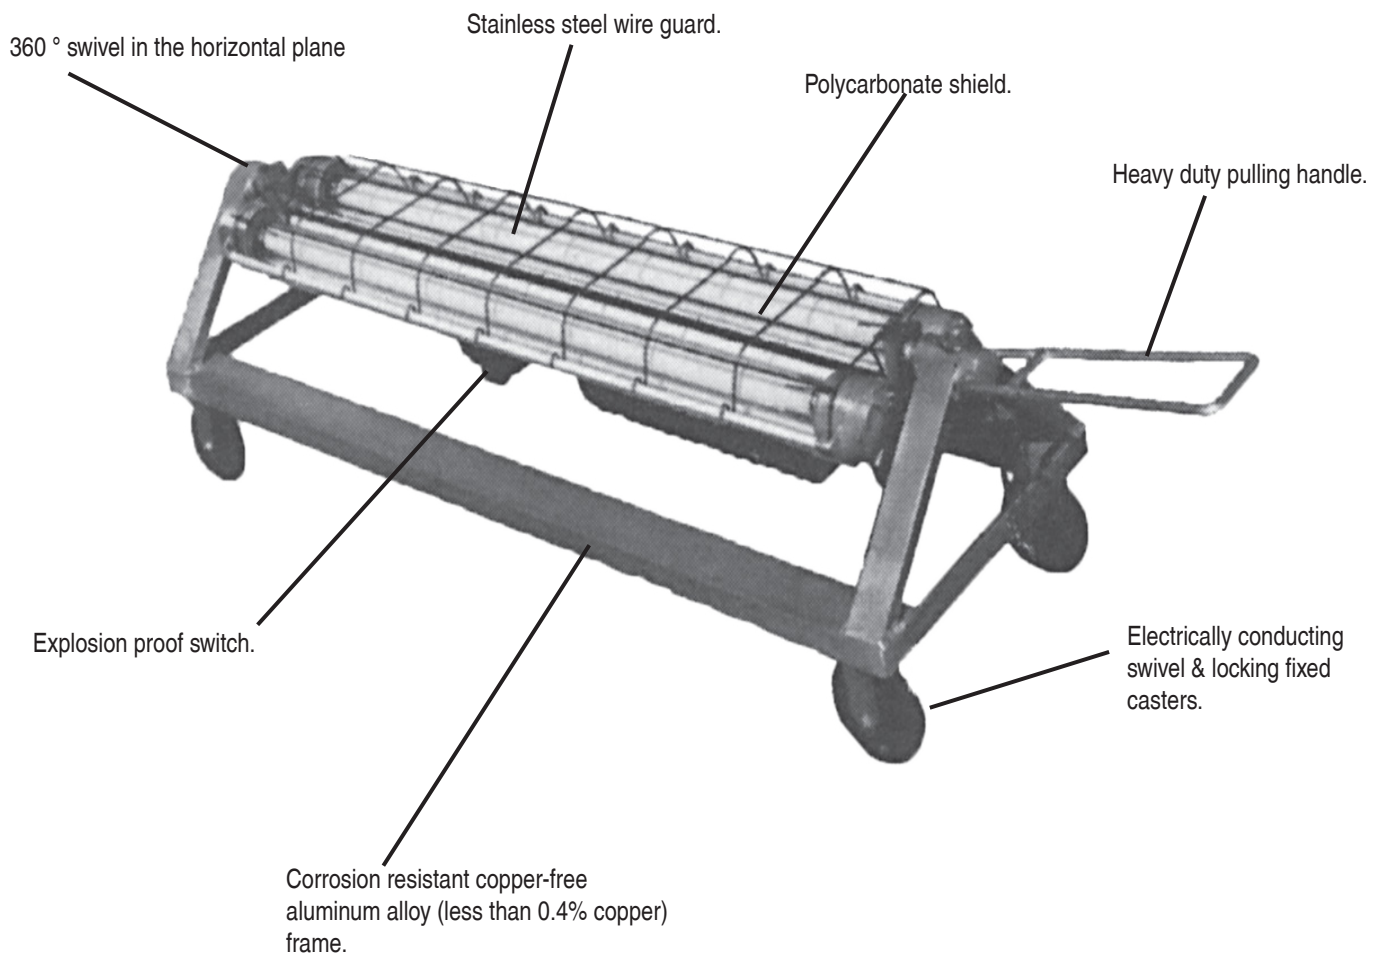

Fixture is furnished with lamps, 50 foot rough duty S.O. cable and explosion proof plug.

XPPL Series heavy duty fixtures are suitable for installation in environments where fire or explosion hazards may exist due to flammable gases or vapors, flammable liquids, or combustible dust, as defined by ANSI/NFPA 70/NEC Article 500. These fixtures are also suitable for installation in wet locations where equipment is subjected to salt water spray, either indoor or outdoor.

FLUORESCENT XPPL Series

Explosion Proof • Paint Spray Booth • UL 844 • UL 781

Catalog Number Logic

XPPL 265-4-2L-A-XX

①

②

③

④

⑤

⑥

①

BASIC SERIES

XPPL SERIES PORTABLE FLUORESCENT FIXTURE

Class I, Division 1, Groups C & D

Class I, Division 2, Groups A, B, C & D

Suitable for Inside Paint Spray Booth

②

LAMP CURRENT/LAMP WATTAGE

1500 = 1500 mA, 110 Watt

800 = 800mA, 60 or 35 Watt

430 = 430mA, 34 or 20 Watt

425 = 425mA, 40 or 20 Watt (Slimline)

270 = 270mA, 40 Watt (Biaxial Lamp)

265 = 265mA, 17 or 32 Watt (T8 Lamp)

③

NOMINAL FIXTURE LENGTH

2 = 2 Foot

4 = 4 Foot

④

NUMBER OF LAMPS

2L = 2 Lamps

4L = 4 Lamps

⑤

VOLTAGE/FREQUENCY

A = 120V/60HZ

(for other voltages- consult factory)

⑥

OPTIONS¹

F = Inline Fuse (External)

HL = Hi Lumen Ballast (T8 Only)

¹ Consult Factory for Pricing

Certification Guide

Maximum Ambient Temperature= 40° C


Maximum Operating Temperature= 120° C (T4A)

Catalog logic is for explaining catalog number structure only. Not all combinations are possible; consult factory for catalog numbers not listed in charts.

FLUORESCENT XPPL Series

Explosion Proof • Paint Spray Booth • UL 844 • UL 781

2-Lamp Portable XP


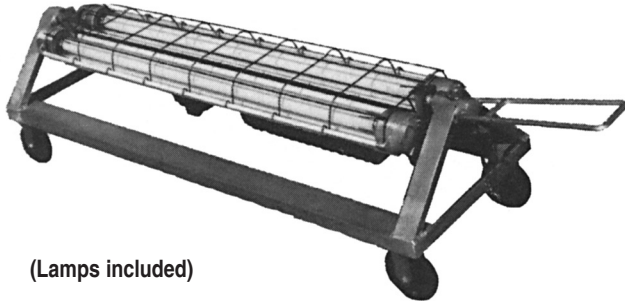


(Lamps included)

- UL781 Portable Electric Lighting Unit
- Fixture suitable for hazardous & hostile locations
- Corrosion-resistant aluminum frame
- Over-sized 5" casters: 1 pair fixed, 1 pair swivel & locking
- Multiple reflective positions
- Pulling handle
- Explosion-proof switch
- Explosion-proof plug
- S.O. Cable (50') suitable for rough duty
- Wire guard and polycarbonate shield
- Electrically conductive wheels

	Description	Voltage	Catalog Number
Two Lamp, 4 ft. Portable Fixture	32 Watt, Instant Start, Medium Bi-Pin, T8 265mA, 48"	120V/60HZ	XPPL265-4-2L-A
	34 Watt, Rapid Start, F40T12 Medium Bi-Pin 430mA, 48"	120V/60HZ	XPPL430-4-2L-A
	60 Watt, Rapid Start, High Output F48T12/HO Recessed Double Contact, 800mA, 48"	120V/60HZ	XPPL800-4-2L-A
	110 Watt, Rapid Start, Very High Output, F48T12/VHO Recessed Double Contact, 1500mA, 48"	120V/60HZ	XPPL1500-4-2L-A
Two Lamp 2 ft. Portable Fixture	40 Watt, Rapid Start, Single End Bi-Pin 4 Pin, 270mA, 22.5"	120V/60HZ	XPPL270-2-2-A

2-Lamp Portable Fixture Dimensions (inches)

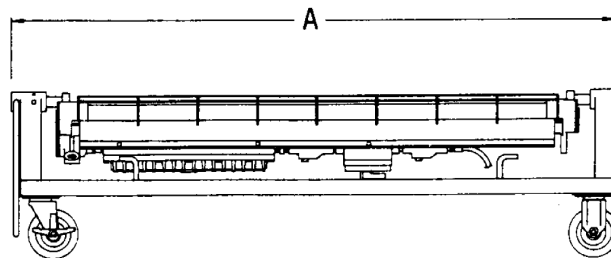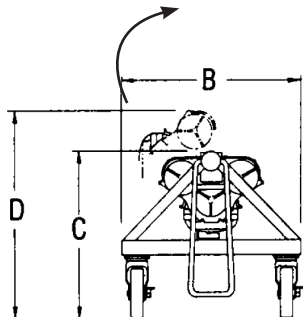


XPPL SERIES	Dimensions (inches)				Boxed Weight	Shipping Volume (Boxed Fixtures)
	A	B	C	D		
2-Lamp XPPL Four Foot Series Fixture	59	18	16.5	21.06	149 lbs.	16 cu. ft.
2-Lamp XPPL Two Foot Series Fixture	35	18	16.5	21.06	99 lbs.	9.75 cu. ft.

FLUORESCENT XPPL Series

Explosion Proof • Paint Spray Booth • UL 844 • UL 781

4-Lamp Portable XP


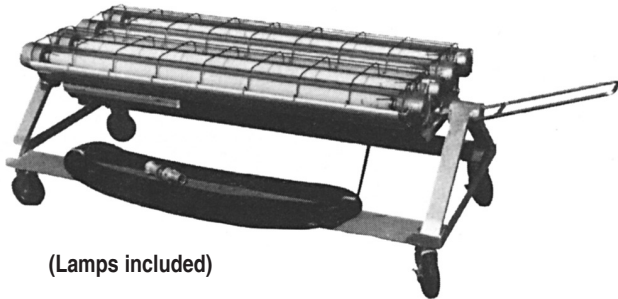


(Lamps included)

- UL 781 Portable Electric Lighting Unit
- Fixture suitable for hazardous & hostile locations
- Corrosion-resistant aluminum frame
- Over-sized 5" casters: 1 pair fixed, 1 pair swivel and locking
- Multiple reflective positions
- Pulling handle
- Explosion-proof switch
- Explosion-proof plug
- S.O. Cable (50') suitable for rough duty
- Wire guard and polycarbonate shield
- Electrically conductive wheels

	Description	Voltage	Catalog Number
Four Lamp, 4 ft. Portable Fixture	32 Watt, Instant Start, Medium Bi-Pin, T8 265mA, 48"	120V/60HZ	XPPL265-4-4L-A
	34 Watt, Rapid Start, F40T12 Medium Bi-Pin 430mA, 48"	120V/60HZ	XPPL430-4-4L-A
	60 Watt, Rapid Start, High Output F48T12/HO Recessed Double Contact, 800mA, 48"	120V/60HZ	XPPL800-4-4L-A
	110 Watt, Rapid Start, Very High Output, F48T12/VHO Recessed Double Contact, 1500mA, 48"	120V/60HZ	XPPL1500-4-4L-A

4-Lamp Portable Dimensions (inches)

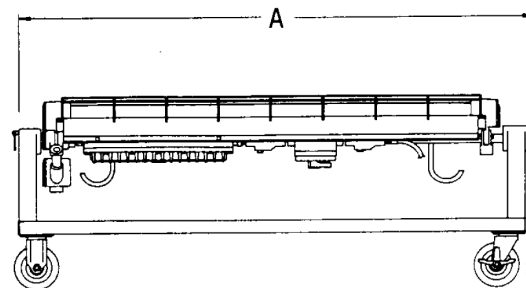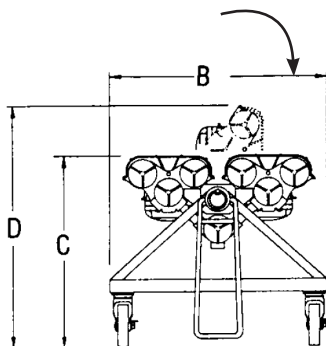

XPPL SERIES	Dimensions (inches)				Boxed Weight	Shipping Volume (Boxed Fixtures)
	A	B	C	D		
4-Lamp XPPL Four Foot Series Fixture	59	25	22.5	28.44	232 lbs.	29 cu. ft.

NOTES